


Range: Timed flow single tap for shower
Ref: 38340 - PRESTO P 500 S B - Concealed

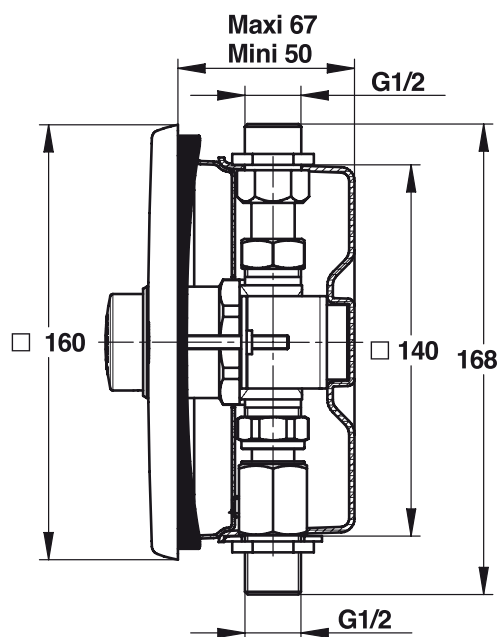

> Working pressure :

- 1 to 5 bar

> Flow :

- 5 l/min at 3 bar with integrated flow limiter
- Anti-water-hammering design

> Flow time :

- Adjustable by washer 30 second timer (-10/+5 seconds)

> Hydraulic supply :

- On/for stop valve and flushing socket
- In-line water inlet F G 1/2" (15x21) - Cold or premixed water

> Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Security :

- Patented anti-blocking "S" system to avoid the water to flow continuously
- Non-removable, wear-proof red marker

> Delivered with :

- 1 Vandal-proof rose
- 1 Flush-mounting case
- 1 Stop valve
- 1 Flushing socket
- 2 washers for flow time adjustment
- Instruction manual

> Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

Ce document n'est pas contractuel ; nous nous réservons le droit de modifier les caractéristiques de nos produits sans préavis. Toutes nos marques et tous modèles sont déposés.

