

SL140


- Kompakt veksler for Varmecentraler
- Fjernvarme – fjernkøl – varmegenvinding – solvarme
- Ydelse op til 940 kW
- Designtryk – PN 25

Lodded varmeveksler SL 140

Varenr.	Antal plader	Vægt	Ydelse [kW] 95-45/45-70° C	Tryktab [kPa]		Tilslutning		L [mm]
				Primær	Sekundær		Stativ	
SL140TL-1-30-EE	30	34	280	4,8	15,0	2½"	2"	93
SL140TL-1-50-EE	50	44	460	4,4	15,0	2½"	2"	149
SL140TL-1-70-EE	70	55	630	4,2	15,0	2½"	2"	205
SL140TL-1-90-EE	90	65	790	4,2	15,0	2½"	2"	261
SL140TL-1-110-EE	110	75	940	4,1	15,0	2½"	2"	317

Isoleringskappe og tilbehør

Varenr.	Betegnelse
SL140/30-50	Isolering for SL140TL-1/30 – SL140TL-1/40 – SL140TL-1/50
SL140/60-90	Isolering for SL140TL-1/60 – SL140TL-1/70 – SL140TL-1/80 – SL140TL-1/90
SL140/90-120	Isolering for SL140TL-1/90 – SL140TL-1/100 – SL140TL-1/110 – SL140TL-1/120
2-24	Stativ med tilslutninger
4500-71	2" unionspakninger

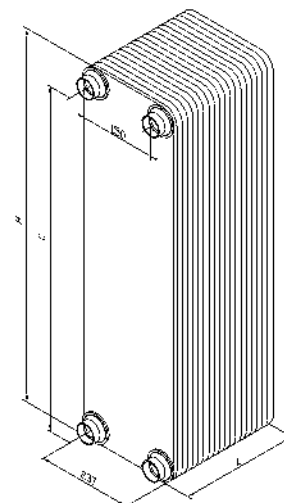

$$L = (N \times 2,8) + 9$$

N = antal plader
 Kmin = 37
 Lmax = 551
 H = 607
 C = 520

